

From Residential to Commercial applications **Multiquip** provides the ideal portable rebar cutting solutions that work faster, safer and are more economical options to torches or saws.

- **Easily move around any job site** with HBC series compact and portable handheld cutters.
- **Maintains a safe working environment** by preventing rebar fragments from flying out with the rebar protective cover.
- **Complete commercial and residential rebar applications** with cutting capacity options of 3/4" or 1".
- **Reliability is guaranteed** thanks to actual load testing prior to delivery.
- **Easily cut different diameters of rebar** by adjusting the space between the blades with the spacing bolt and nut.
- **Protect and easily store your rebar cutter** with the carrying box as a standard feature.
- **Easily return the cutter blade to its starting position** in the event of a jam with the return valve.
- **Cut through up to grade 60 rebar** with an electrohydraulic design coupling a powerful electric motor with a compact hydraulic pump.

**AUTEK MAQUINARIA 5392 7077**



#### **HBC19B**

**Maximum Cutting Diameter In (mm)** 3/4 (19)  
#6 rebar grade 60

**Voltage/Amperage** 115V 60Hz 11 amps

**Maximum Cutting Speed** 2.5 sec.

**Operating Weight Lb (Kg)** 28.2 (12.8)



**Maximum Cutting Diameter In (mm)** 1 (25) #8 rebar grade 60

**Voltage/Amperage** 115V 60Hz 13 amps


**Maximum Cutting Speed** 3.5 sec.

**Operating Weight Lb (Kg)** 48.5 (22)



#### **Hydraulic Pump**

allows for maximum performance in a light, small, quiet and smooth operating package.

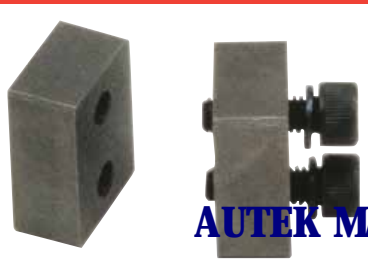

#### **Blades**

act as rotating cutting blocks with 4 cutting edges to maximize service life



**AUTEK MAQUINARIA 5392 7077**

# Specifications

**AUTEK MAQUINARIA 5392 7077**

## REBAR CUTTERS

Model	HBC19B	HBC25B
Cutting Capacity Grade 40		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Cutting Capacity Grade 50		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Cutting Capacity Grade 60		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Max. Cutting Speed	2.5 sec.	3.5 sec.
Rated Power	1330 watts	1430 watts
Electric Motor	115 volt, 60 Hz, single-phase AC	
Dimensions and Weight		
Length in. (cm)	15.6 (39.6)	18.9 (48)
Width in. (cm)	4.4 (11)	5.4 (13.7)
Height in. (cm)	8.7 (23)	10.6 (26.9)
Operating Weight lb. (kg)	28.2 (12.8)	48.5 (22)
Shipping Weight lb. (kg)	39 (17.7)	67 (30.3)
Standard Equipment		
Hex Wrenches	4	4
Hydraulic Oil	1	1
Carrying Box	Wood	Wood

## REBAR BENDERS



All features and specifications are subject to change without notice.  
Form MQMA-CONPUM-D Rev. P (01-13)



**AUTEK MAQUINARIA 5392 7077**